


# **SPECIALS**

Hand Scraped

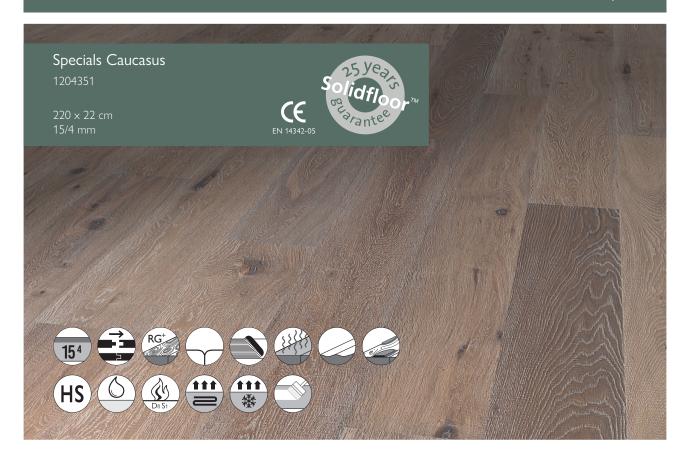

**Packaging** 

Boards per pack: 6 boards m² per pack: 2,904 m² Weight per pack: 23 kg

Broken lenghts per pack: 25% minimal 60 cm length

**Dimensions** 

Length:220 cmWidth:22 cmThickness (total):15 mmTop layer:3,5-4,0 mm

### Dimensional tolerances according to EN13489

Length: 0,20% Width: 0,2 mm

Thickness: Total: 15 mm  $\pm$  0,2 mm

Top layer: 3,5-4,0 mm Height difference between the panels: ≤0,2 mm

Squareness:≤0.2% across the widthCup:≤0.2% across the widthSpring:≤0.1% over the lengthBend:≤1% over the length

# Other Specifications

Formaldehyde emission: E1
Insulation value: R=0,115m2 k/w
Brinell hardness: Average HB 3.7

## Additional specifications

Bevel: Rounded

Construction: 3-layerd

Moisture content: 7% +/- 2%

Locking system: Tongue and groove

#### Instructions and Maintenance

Oil immediately after installation.

Maintain with Solidfloor™ Ultimate Hardwax White & Solidfloor™ Woodcleaner. Suitable for underfloor heating & cooling (visit www.solidfloor.com for more information).







